


33/20L 33/11L

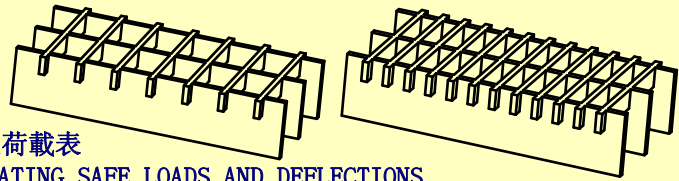

扁鋼中心間距為33mm 壓鎖鋼格板 常用規格及荷載表

FLAT BAR CENTERS 33mm PRESSURE-LOCKED GRATING SAFE LOADS AND DEFLECTIONS

型号 TYPE	扁鋼 寬度 DEPTH mm	扁鋼 厚度 THICK mm	橫杆尺寸 CROSS BAR SIZE mm	理論重量 MASS kg/m ²	跨距 SPAN mm														
					200	400	600	800	1000	1200	1400	1600	1800	2000	2200	2400	2600	2800	
G603/33/11L	60	3	20X2	77.5	U	1669	417	185	104	66	46	34	26	20	16	13	11	9	8
					D	0.11	0.46	1.03	1.84	2.86	4.15	5.71	7.50	9.31	11.44	13.73	16.60	18.95	22.84
G603/33/20L	60	2	20X2	67.3	C	166	83	55	41	33	27	23	20	18	16	15	13	12	11
					D	0.09	0.37	0.82	1.45	2.29	3.26	4.44	5.81	7.51	9.24	11.63	13.28	15.78	18.32
G602/33/11L	60	2	20X2	61.7	U	1112	278	123	69	44	30	22	17	13	11	9	7	6	5
					D	0.11	0.46	1.03	1.83	2.87	4.07	5.57	7.39	9.13	11.85	14.33	16.03	19.14	21.81
G602/33/20L	60	2	20X2	51.5	C	111	55	37	27	22	18	15	13	12	11	10	9	8	7
					D	0.09	0.36	0.83	1.44	2.30	3.27	4.36	5.70	7.55	9.58	11.73	13.89	15.97	18.32
G503/33/11L	50	3	20X2	69.1	U	1159	289	128	72	46	32	23	18	14	11	9	8	7	6
					D	0.14	0.55	1.24	2.20	3.45	5.01	6.72	8.03	11.35	13.74	16.64	21.11	24.84	
G503/33/20L	50	2	20X2	58.9	C	115	57	38	28	23	19	16	14	12	11	10	9	8	7
					D	0.11	0.43	0.98	1.72	2.77	3.98	5.37	7.09	8.75	11.13	13.64	16.18	18.32	
G502/33/11L	50	2	20X2	56.0	U	772	193	85	48	30	21	15	12	9	7	6	5	4	3
					D	0.14	0.55	1.23	2.21	3.39	4.95	6.60	9.08	11.03	13.26	16.81	20.11	23.84	
G502/33/20L	50	2	20X2	45.8	C	77	38	25	19	15	12	11	9	8	7	6	5	4	3
					D	0.11	0.45	0.97	1.75	2.72	3.79	5.56	6.89	8.83	10.77	14.44	16.42	18.32	
G453/33/11L	45	3	10X2	53.0	U	938	234	104	58	37	26	19	14	11	9	7	6	5	4
					D	0.15	0.61	1.38	2.44	3.81	5.58	7.60	9.84	12.23	15.39	17.76	21.78	24.84	
G453/33/20L	45	2	10X2	46.2	C	93	46	31	23	18	15	13	11	10	9	8	7	6	5
					D	0.12	0.48	1.10	1.94	2.98	4.31	5.98	7.64	9.98	12.46	14.94	17.28	19.32	
G452/33/11L	45	2	10X2	41.2	U	625	156	69	38	25	17	12	9	7	6	5	4	3	2
					D	0.15	0.61	1.37	2.46	3.87	5.49	7.23	9.34	11.75	15.47	19.08	22.84		
G452/33/20L	45	2	10X2	34.4	C	62	31	20	15	12	10	8	7	6	5	4	3	2	1
					D	0.12	0.49	1.06	1.90	2.98	4.33	5.56	7.34	9.08	12.54	14.20	16.84	19.32	
G403/33/11L	40	3	10X2	48.8	U	741	185	82	46	29	20	15	11	9	7	6	5	4	3
					D	0.17	0.69	1.55	2.75	4.26	6.13	8.58	10.83	14.31	17.18	21.76	24.84		
G403/33/20L	40	2	10X2	42.1	C	74	37	24	18	14	12	10	9	8	7	6	5	4	3
					D	0.14	0.55	1.21	2.16	3.30	4.93	6.59	8.94	11.44	13.93	16.21	18.32		
G402/33/11L	40	2	10X2	38.3	U	494	123	54	30	19	13	10	7	6	4	3	2	1	0
					D	0.17	0.69	1.53	2.70	4.20	6.00	8.60	10.41	14.39	14.98	17.28	19.32		
G402/33/20L	40	2	10X2	31.5	C	49	24	16	12	9	8	706	6	5	4	3	2	1	0
					D	0.14	0.54	1.21	2.16	3.20	4.94	673.74	8.98	10.84	12.20	14.20	16.84	19.32	
G353/33/11L	35	3	10X2	44.6	U	567	141	63	35	22	15	11	8	7	5	4	3	2	1
					D	0.20	0.78	1.78	3.13	4.84	6.89	9.45	11.86	16.73	18.58	21.78	24.84		
G353/33/20L	35	2	10X2	37.9	C	56	28	18	14	11	9	8	7	6	5	4	3	2	1
					D	0.16	0.62	1.36	2.51	3.89	5.55	7.90	10.45	12.95	15.12	17.28	19.32		
G352/33/11L	35	2	10X2	35.4	U	378	94	42	23	15	10	7	5	4	3	2	1	0	0
					D	0.20	0.78	1.78	3.09	4.96	6.91	9.07	11.23	14.58	17.28	19.32	21.78		
G352/33/20L	35	2	10X2	28.7	C	37	18	12	9	7	6	5	4	4	3	2	1	0	0
					D	0.15	0.60	1.36	2.43	3.72	5.57	7.47	9.10	13.06	15.12	17.28	19.32		
G303/33/11L	30	3	10X2	40.4	U	417	104	46	26	16	11	8	6	5	4	3	2	1	0
					D	0.23	0.92	2.06	3.70	5.61	8.07	10.99	14.24	19.21	21.78	24.84	27.84		
G303/33/20L	30	2	10X2	33.7	C	41	20	13	10	8	6	5	5	4	3	2	1	0	0
					D	0.18	0.71	1.56	2.86	4.51	5.93	7.97	11.99	14.01	16.84	19.32	21.78		
G302/33/11L	30	2	10X2	32.6	U	278	69	30	17	11	7	5	4	3	2	1	0	0	0
					D	0.23	0.91	2.02	3.64	5.80	7.75	10.39	14.35	17.28	19.32	21.78	24.84		
G302/33/20L	30	2	10X2	25.8	C	27	13	9	6	5	4	3	3	2	1	0	0	0	
					D	0.18	0.69	1.62	2.58	4.25	5.97	7.28	10.98	13.28	15.78	18.32	20.84		
G253/33/11L	25	3	10X2	36.2	U	289	72	32	18	11	8	5	4	3	2	1	0	0	0
					D	0.27	1.10	2.48	4.44	6.70	10.20	12.06	16.68	19.32	21.78	24.84	27.84		
G253/33/20L	25	2	10X2	29.5	C	28	14	9	7	5	4	4	3	2	1	0	0	0	
					D	0.21	0.85	1.87	3.47	4.92	6.92	11.08	12.79	15.78	18.32	20.84	23.32		
G252/33/11L	25	2	10X2	29.7	U	193	48	21	12	7	5	3	3	2	1	0	0	0	0
					D	0.28	1.10	2.45	4.46	6.43	9.64	11.02	18.81	21.78	24.84	27.84	30.84		
G252/33/20L	25	2	10X2	22.9	C	19	9	6	4	3	3	2	2	1	0	0	0	0	
					D	0.22	0.83	1.87	3.00	4.47	7.80	8.58	12.97	15.78	18.32	20.84	23.32		
G203/33/11L	20	3	10X2	32.0	U	185	46	20	11	7	5	3	2	1	0	0	0	0	0
					D	0.34	1.37	3.04	5.34	8.40	12.61	14.46	17.28	19.32	21.78	24.84	27.84		
G203/33/20L	20	2	10X2	25.3	C	18	9	6	4	3	3	2	2	1	0	0	0	0	
					D	0.27	1.08	2.44	3.91	5.85	10.21	11.28	14.20	16.84	19.32	21.78	24.84		
G202/33/11L	20	2	10X2	26.8	U	123	30	13	7	4	3	2	1	0	0	0	0	0	0
					D	0.34	1.34	2.97	5.12	7.29	11.52	14.66	17.28	19.32	21.78	24.84	27.84		
G202/33/20L	20	2	10X2	20.0	C	12	6	4	3	2	2	1	1	0	0	0	0	0	
					D	0.27	1.08	2.45	4.41	5.90	10.32	8.94	11.28	13.28	15.78	18.32	20.84		

U - 格棚板安全承載許可的最大均布荷載,
Safe uniform load, kN/m²;
C - 格棚板安全承載許可的最大線荷載,
Safe concentrated load, kN/m;
D - 格棚板在所列荷載作用下的最大撓度,
Max. deflection, mm;
綠色粗線左方區域的格棚板在 2kN/m² 的
均布荷載作用下其最大撓度小於 4 mm.
The left side of the green bold line in this
table, those gratings not exceeds 4 mm
deflection for uniform load of 2kN/m².