


33/66L 33/33L

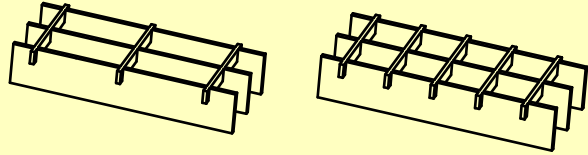

扁鋼中心間距為33mm 壓鎖鋼格板 常用規格及荷載表

FLAT BAR CENTERS 33mm PRESSURE-LOCKED GRATING SAFE LOADS AND DEFLECTIONS

型號 TYPE	扁鋼 寬度 DEPTH mm	扁鋼 厚度 THICK mm	橫杆尺寸 CROSS BAR SIZE mm	理論重量 MASS kg/m ²		跨距 SPAN mm															
						200	400	600	800	1000	1200	1400	1600	1800	2000	2200	2400	2600	2800		
G603/33/33L	60	3	20X2	60.5	U	1669	417	185	104	66	46	34	26	20	16	13	11	9	8		
					D	0.11	0.46	1.03	1.84	2.86	4.14	5.70	7.47	9.26	11.36	13.62	16.44	18.72	22.54		
G603/33/66L	60	3	20X2	55.4	C	166	83	55	41	33	27	23	20	18	16	15	13	12	11		
					D	0.09	0.37	0.82	1.45	2.29	3.25	4.42	5.78	7.45	9.16	11.51	13.11	15.55	18.01		
G602/33/33L	60	2	20X2	44.8	U	1112	278	123	69	44	30	22	17	13	11	9	7	6			
					D	0.11	0.46	1.03	1.83	2.86	4.06	5.54	7.34	9.05	11.73	14.16	15.78	18.80			
G602/33/66L	60	2	20X2	39.7	C	111	55	37	27	22	18	15	13	12	11	10	9	8			
					D	0.09	0.36	0.83	1.43	2.29	3.26	4.34	5.65	7.47	9.47	11.55	13.65	15.63			
G503/33/33L	50	3	20X2	52.1	U	1159	289	128	72	46	32	23	18	14	11	9	8				
					D	0.14	0.55	1.23	2.20	3.45	4.89	6.68	8.97	11.26	13.90	16.44	20.82				
G503/33/66L	50	3	20X2	47.1	C	115	57	38	28	23	19	16	14	12	11	10	9				
					D	0.11	0.43	0.96	1.72	2.76	3.97	5.34	7.03	8.66	10.99	13.44	15.90				
G502/33/33L	50	2	20X2	39.0	U	772	193	85	48	30	21	15	12	9	7	6	5				
					D	0.14	0.55	1.23	2.20	3.37	4.92	6.55	8.99	10.90	13.95	16.50	19.68				
G502/33/66L	50	2	20X2	33.0	C	77	38	25	19	15	12	11	9	8	7	7	6				
					D	0.11	0.43	0.97	1.75	2.71	3.77	5.51	6.80	8.69	10.86	14.13	15.99				
G453/33/33L	45	3	10X2	42.9	U	838	234	104	58	37	26	19	14	11	9	7	6				
					D	0.15	0.61	1.38	2.43	3.80	5.57	7.58	9.60	12.17	15.29	17.62	21.58				
G453/33/66L	45	3	10X2	40.3	C	93	46	31	23	18	15	13	11	10	9	8	7				
					D	0.12	0.48	1.10	1.93	2.97	4.30	5.96	7.80	9.91	12.36	14.81	17.08				
G452/33/33L	45	2	10X2	31.0	U	625	156	69	39	25	17	12	9	7	6	5					
					D	0.15	0.61	1.37	2.46	3.86	5.47	7.20	9.28	11.66	15.33	18.87					
G452/33/66L	45	2	10X2	28.6	C	62	31	20	15	12	10	8	7	6	6	5					
					D	0.12	0.49	1.06	1.89	2.97	4.31	5.52	7.28	8.99	12.40	14.00					
G403/33/33L	40	3	10X2	38.7	U	741	185	82	46	29	20	15	11	9	7	6					
					D	0.17	0.69	1.55	2.75	4.25	6.11	8.54	10.78	14.22	17.04	21.56					
G403/33/66L	40	3	10X2	36.1	C	74	37	24	18	14	12	10	9	8	7	6					
					D	0.14	0.55	1.21	2.16	3.30	4.91	6.56	8.88	11.35	13.80	16.01					
G402/33/33L	40	2	10X2	28.1	U	494	123	54	30	19	13	10	7	6	4						
					D	0.17	0.69	1.53	2.69	4.18	5.97	8.56	10.32	14.26	14.78						
G402/33/66L	40	2	10X2	25.6	C	49	24	16	12	9	8	7	6	5	4						
					D	0.14	0.54	1.21	2.16	3.18	4.92	6.89	8.90	10.71	12.00						
G353/33/33L	35	3	10X2	34.5	U	567	141	63	35	22	15	11	8	7	5						
					D	0.20	0.78	1.77	3.13	4.82	6.87	9.40	11.78	16.60	18.38						
G353/33/66L	35	3	10X2	31.9	C	56	28	18	14	11	9	8	7	6	5						
					D	0.16	0.62	1.35	2.51	3.87	5.52	7.85	10.36	12.82	14.92						
G352/33/33L	35	2	10X2	25.3	U	378	94	42	23	15	10	7	5	4							
					D	0.20	0.78	1.77	3.09	4.94	6.88	9.00	11.10	14.38							
G352/33/66L	35	2	10X2	22.7	C	37	18	12	9	7	6	5	4	4							
					D	0.15	0.60	1.35	2.42	3.70	5.53	7.40	8.98	12.86							
G303/33/33L	30	3	10X2	30.3	U	417	104	46	26	16	11	8	6	5							
					D	0.23	0.92	2.06	3.69	5.59	8.03	10.91	14.11	19.00							
G303/33/66L	30	3	10X2	27.7	C	41	20	13	10	8	6	5	5	4							
					D	0.18	0.71	1.55	2.85	4.49	5.89	7.90	11.86	13.79							
G302/33/33L	30	2	10X2	22.4	U	278	69	30	17	11	7	5	4								
					D	0.23	0.91	2.02	3.63	5.77	7.68	10.28	14.16								
G302/33/66L	30	2	10X2	19.8	C	27	13	9	6	5	4	3	3								
					D	0.18	0.69	1.61	2.57	4.22	5.90	7.17	10.78								
G253/33/33L	25	3	10X2	26.1	U	289	72	32	18	11	8	5	4								
					D	0.27	1.10	2.48	4.43	6.66	10.13	11.92	16.45								
G253/33/66L	25	3	10X2	23.5	C	28	14	9	7	5	4	4	3								
					D	0.21	0.85	1.86	3.46	4.88	6.84	10.94	12.56								
G252/33/33L	25	2	10X2	19.5	U	193	48	21	12	7	5	3	3								
					D	0.28	1.10	2.44	4.44	6.38	9.53	10.83	18.47								
G252/33/66L	25	2	10X2	17.0	C	19.32	9.66	6.44	4.83	3.86	3.22	2.76	2.41								
					D	0.22	0.88	2.00	3.58	5.65	8.23	11.35	15.06								
G203/33/33L	20	3	10X2	21.9	U	185	46	20	11	7	5	3									
					D	0.34	1.37	3.03	5.31	8.33	12.47	14.20									
G203/33/66L	20	3	10X2	19.3	C	18	9	6	4	3	3	2									
					D	0.27	1.07	2.43	3.89	5.78	10.07	11.02									
G202/33/33L	20	2	10X2	16.6	U	123	30	13	7	4	3	2									
					D	0.34	1.34	2.96	5.08	7.19	11.31	14.28									
G202/33/66L	20	2	10X2	14.1	C	12	6	4	3	2	2	1									
					D	0.27	1.07	2.43	4.37	5.80	10.11	8.55									

U - 格棚板安全承載許可的最大均布荷載,
Safe uniform load, kN/m²;
C - 格棚板安全承載許可的最大線荷載,
Safe concentrated load, kN/m;
D - 格棚板在所列荷載作用下的最大撓度,
Max. deflection, mm;
綠色粗線左方區域的格棚板在 2kN/m² 的
均布荷載作用下其最大撓度小於 4 mm.
The left side of the green bold line in this
table, those gratings not exceeds 4 mm
deflection for uniform load of 2kN/m².