

鋼格板溝蓋

GRATING DRAINAGES

鋼格板溝蓋用在人行道、車行道、庭院或建築物的地面作為水溝、管線溝、地下通道、風井、採光井、檢查井等的蓋板。

鋼格板溝蓋通常由固定的框和活動的鋼格板蓋板組成。根據需要可以配上緊固機構或防盜裝置。

Grating drainages are used as cover for trench, piping channel, underground access, ventilation hole, sunshine pit and manhole on the floor of pedestrian and vehicular passage, courtyard or building etc.


Grating drainages are made up of fixed frame and removable grating in common. Fastening members or security device available on request.

GT 型側溝、橫斷溝鋼格板溝蓋


GT LATERAL OR TRAVERSE TRENCH COVERS

車行道鋼格板溝蓋根據車行方向分為側溝蓋和橫斷溝蓋。承載扁鋼與車行方向垂直的稱之為側溝蓋，承載扁鋼與車行方向平行的稱之為橫斷溝蓋。

Vehicle passage drainage can be defined to lateral drainage and traverse drainage upon vehicle running direction. Gratings load bar vertical to vehicle running direction, which is named lateral drainage. Gratings load bar parallel to vehicle running direction, which is named traverse drainage.

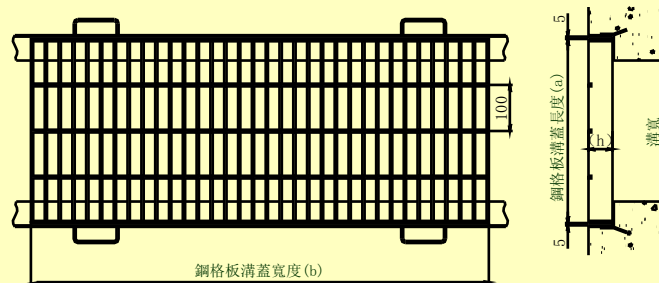

側溝、橫斷溝蓋型号舉例：

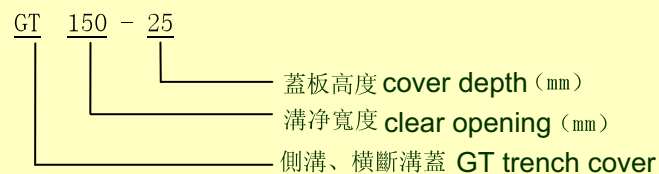

車道溝蓋的荷載等級 Load class of vehicular drainage

荷載級別 Load class	車輛滿載質量 Vehicle full loading mass (Kg)	後單輪荷載 Back single wheel load (kN)	輪壓面積 a×b Wheel impact area (mm ²)
T-25	25000	100	200×500
T-20	20000	80	200×500
T-14	14000	56	200×500
T-6	6000	24	200×240
T-2	2000	8	200×160