

操作平台鋼格板的安全規定

SAFETY WORKING PLATFORM GRATINGS

國際標準 ISO 14122-2《機械安全 進入機器和工業設備的固定設施 第2部份 工作平台和通道》，強調了工作平台或通道地板的安全。


這裡引述了其中一條規定：

4. 2. 4. 4 避免由墜落物體引起的危險

-工作平台或通道地板最大開口應不能讓直徑 35mm 的球體通過其下落。

-在有人的地方上面的地板最大開口應不能使直徑 20mm 的球體通過其下落，否則應採用其他適當設施保證同等的安全水平。

中國國家強制性標準 GB17888.2 也作出了同樣的規定。

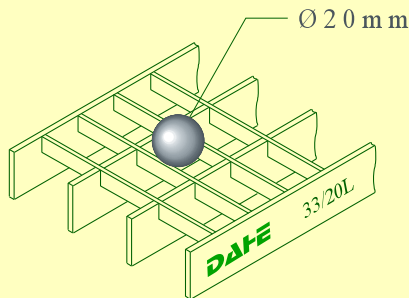

International Standard ISO 14122-2 Safety of Machinery – Permanent Means of Access to Machinery and Industrial Equipment - Part 2: Working Platform and Walkways emphasizes the safety of working platform or walkways.

Here one stipulation is cited as following.

4.2.4.4 Hazards generated by falling objects

-The flooring of a working platform or walkway shall only have such maximum openings that a ball with a diameter of 35mm cannot fall through.

-Floorings above a place where people are working, as opposed to occasional passage, shall have such maximum openings that a ball with a diameter of 20mm cannot fall through unless the same safety is guaranteed by other suitable means.

The same particular is stipulated in China National Compelling Standard GB17888.2

操作平台鋼格板的安全規格

 20/100W	 20/50W	 33/20L	 33/11L
 15/100W	 15/50W	 20/100L	 20/50L
 12.5/100W		 15/100L	 15/50L
		 12.5/100L	 12.5/50L